DEKS

Technical Documents

1: Drawings DC102BC&DC102GC

2: Flashings Technical Specifications

Follow Us On

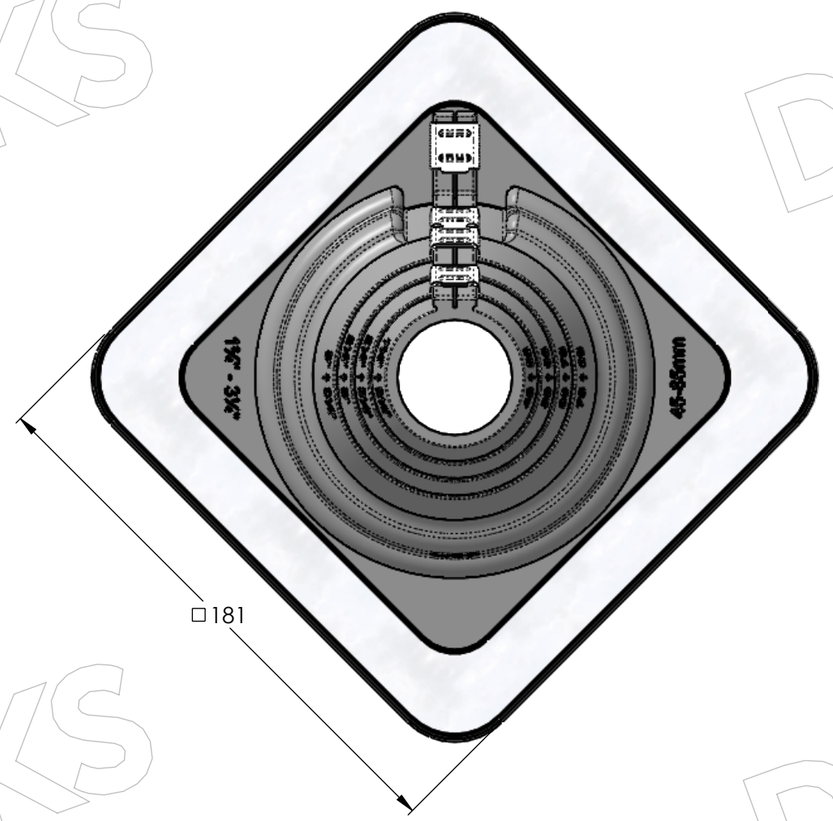

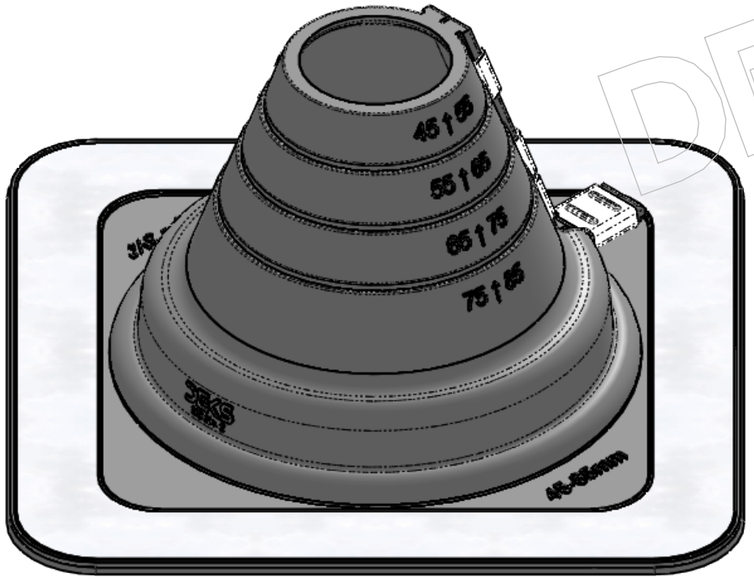

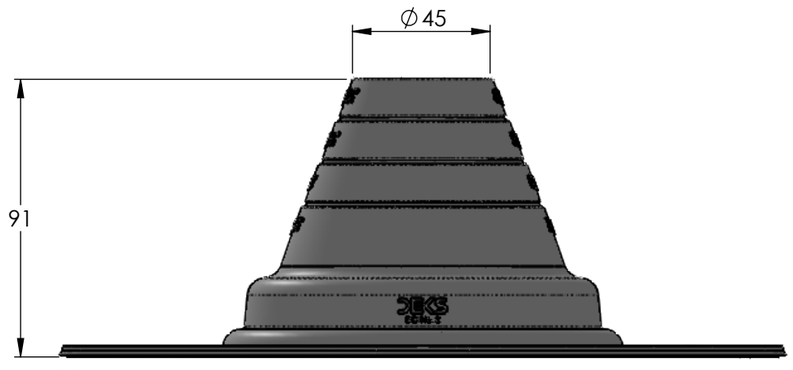

PART NUMBER	DISPLAY NAME	MATERIAL
DC102BC	Dektite Combo #2 Blk (45-85mm/1.75-3.25") + clips	EPDM/ALU
DC102GC	Dektite Combo #2 Gry (45-85mm/1.75-3.25") + clips	EPDM/ALU
DC202REC	Dektite Combo #2 Red Sil (45-85mm/1.75-3.25") + clips	SILICONE/ALU

DEKS Industries Pty. Ltd.
ABN 77 107 135 544

www.deks.com.au

BAL Assessments Roof Flashings

Deks Industries Pty. Ltd. has tested its roof flashing for BAL (Bushfire Attack Level) to clause 20 of AS 1530.8.1 – 2007: "Methods for fire test on building materials, components and structures, Part 8.1 tests on elements of construction for buildings exposed to simulated bushfire attack – radiant heat and small flaming sources" and complies with it as per the table below.

All testing was completed by CSIRO Infrastructure Technologies.

BAL Rating	Models	Polymer	Use on min. 18° Roof Pitch for	CSIRO Report No.	Date of Issue
12.5	DC - Dektite Combo (no split) DFE – Dektite Premium DNL – Dektite Nu-Lead	EPDM EPDM EPDM	Metal Roofs Metal Roofs Tiled Roofs	EP1312912 EP1312912 EP1312992	Dec 2013 Dec 2013 Dec 2013
19	FFR – Fast Flash	MS Polymer	Tiled Roofs	EP159257	Dec 2015
29	DC - Dektite Combo (no split) DFE – Dektite Premium PFR - Perform	Silicone Silicone MS Polymer	Metal Roofs Metal Roofs Tiled Roofs	EP1312939 EP1312939 EP148152	Dec 2013 Dec 2013 Oct 2014